

QUANTM™ i230 INDUSTRIAL PUMPS

TECHNICAL SPECIFICATIONS


	US	METRIC
Maximum Fluid Pressure	100 psi	6.89 bar
Maximum Fluid Flow	230 gpm	870 lpm
Maximum Particle Size	3/8 in	9.5 mm
Environmental Temp Rating	-4 to 104° F	-20° to 40° C
Fluid Connection	3.0 in ANSI Flange	
Suction Lift	Dry 10 ft / Wet 28 ft	Dry 3 m / Wet 8.5 m
Approvals	UL and CE Non-Hazardous Locations	
IP Ratings	IP66	
Fluid Section Materials	Aluminum	
Seat Options	Santoprene, Stainless Steel, Buna-N, Fluoroelastomer, G.E.T. (Graco Engineered Thermoplastic), TPE	
Check Ball Options	Santoprene, Polychloroprene, Buna-N, Fluoroelastomer, G.E.T. (Graco Engineered Thermoplastic), Acetal, PTFE	
Diaphragm Options	Santoprene, Polychloroprene, Buna-N, Fluoroelastomer, G.E.T. (Graco Engineered Thermoplastic), TPE, PTFE/Santoprene 2-Piece	



ELECTRICAL SPECIFICATIONS


Rated Voltage	380-480 VAC
Phase	3
Frequency	50/60 Hz
Current	14 A
Plug Type	Field Wireable

PERFORMANCE

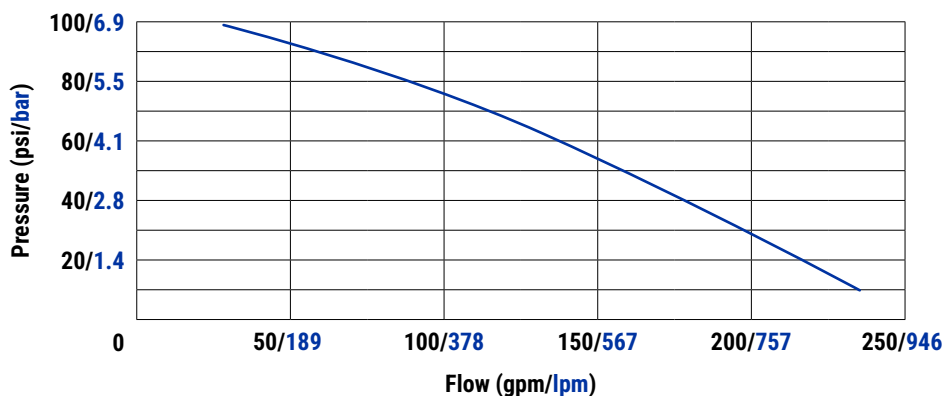



DIMENSIONS

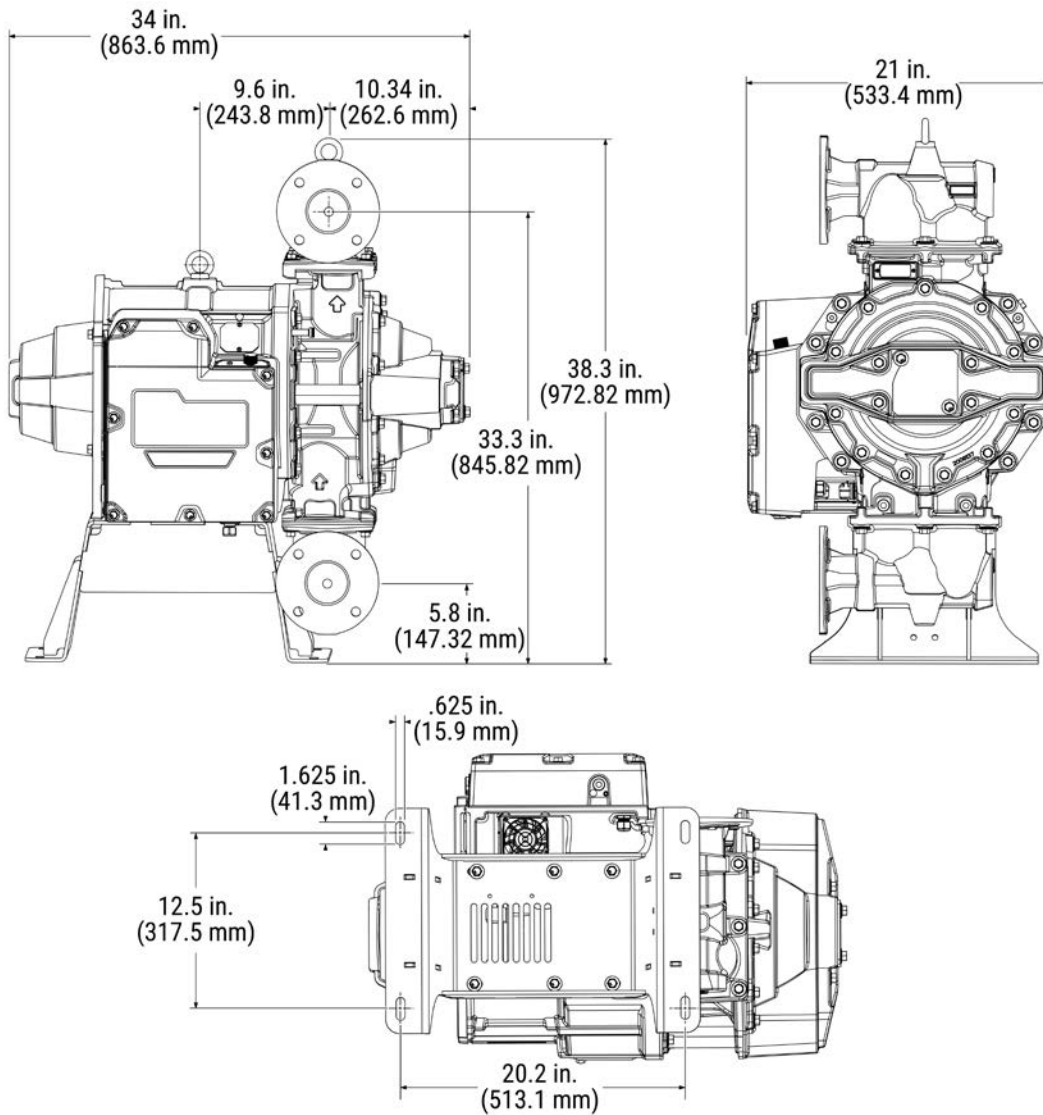

WEIGHT

	US (LBS)	METRIC (KG)
Fluid Section	130	59
Complete Pump	388	176

For more information, visit [graco.com](https://www.graco.com)