

Binks®

AUTOCURE™

Infrared Emitters



binks.com

The Binks AUTOCURE™ line of Infrared Heaters provide users with a wide range of solutions to fit production needs.

The Binks 3000, 5000, 6000 & 8000 models – available in a variety of heater head sizes – feature infrared control technology and provides easy maneuverability and accuracy for curing spot repairs.


The Binks Model 6000 overhead heater is specifically designed for overhead XY gantry mounting. Each unit includes an electric linear actuator the operator uses for flexible heater positioning prior to the drying process.

AutoCure heaters meet or exceed all standards for wiring, testing and construction and are the industry leaders when it comes to critical curing performance and reliability.



Features:

- Accurate surface temperature control to $\pm 5^{\circ}\text{F}$
- Automatic control
- Laser Spot Sensor – Position Temperature Indicator
- Power assisted raise and lower
- Cycle-time-remaining display
- Automatic timed shut-off
- Heater head remains in place without locking handles
- Single or dual temperature setpoint capability
- Adjustable time temperature heat cycles
- Heating range to 400°F (204°C)
- Locking mechanism to maintain arm position
- Adjustable controlled ramp rates to setpoint

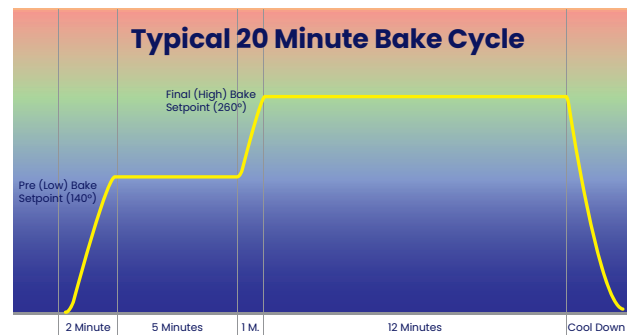

Binks systems routinely experience lamp life of **10,000 hours and more**


Binks Infrared Emitters incorporate unique shortwave T3 emitters exclusively manufactured for Binks equipment. Providing the most efficient heat transfer – direct and penetrating – emitters maximize your process and productivity.

Halogen gas filled clear quartz tubes include tantalum discs, tungsten filaments, stainless steel leads and durable ceramic end seals, Binks Emitters provide direct, reflected and convective energy spanning all wavelengths. Rated with 5,000 hour lamp life, proprietary Binks systems routinely experience lamp life of 10,000 hours or more delivering great value.

AutoCure™ 3000 Portable Heater – Standard Product

2 Lamps • Single Head • 1,600 W

The AutoCure 3000 is a portable infrared heater for curing post & sill repairs. The unit has temperature control and laser-sighting technology and is designed for small spot repairs.

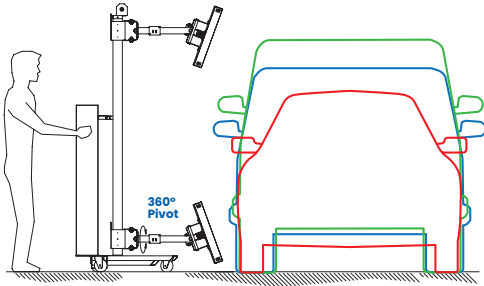


Can be configured for

- Cars
- SUVs, Trucks
- Commercial Trucks




AutoCure 3000

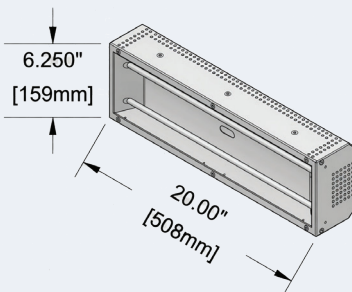

Part Number	Voltage	Temp	Power %
AC3-2116-240-F-100	240V	F	100
AC3-2116-480-F-100	480V	F	100
AC3-2116-480-F-75	480V	F	75
AC3-2116-480-C-100	480V	C	100

AutoCure™ 5000 Portable Heater – Standard Product

The AutoCure 5000 is a portable curing unit used for spot repairs and comes in a variety of sizes to meet application needs. The unit offers a heating range to 400 degrees F (204 degrees C) with an accuracy of ± 10 degrees F. The unit comes standard with temperature control, laser-sighting technology, single or dual temperature set-point capability, automatic control, automated timed heat cycle, automatic shut-off and locking wheels to maintain position.

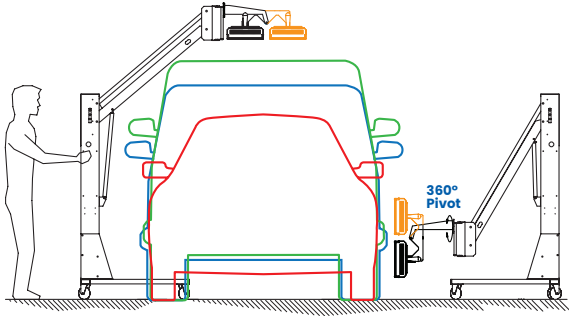


Can be configured for


- Cars
- SUVs, Trucks
- Commercial Trucks




AutoCure 5000




2225 - 2 Lamp / Dual Head




4125 - 4 Lamp / Single Head



4138 - 4 Lamp / Single Head



4225 - 4 Lamp / Dual Head



4238 - 4 Lamp / Dual Head

Cars

Part Number	Lamps/Head	Watts	Voltage	Temp/Power	Min Ht.	Max Ht.
AC5-4225-480-PL-CRL-20-F-75	4 / Dual	2.5 kW	480V	°F / 75%	2.3"	67"
AC5-4225-480-PL-CRL-20-C-75	4 / Dual	2.5 kW	480V	°C / 75%	2.3"	67"

SUVs / Pickups / Trucks

Part Number	Lamps/Head	Watts	Voltage	Temp/Power	Min Ht.	Max Ht.
AC5-2116-240-F-100	2 / Single	1.6 kW	240V	°F / 100%	6.5"	83.6"
AC5-2116-480-SP-STE-10-F-100	2 / Single	1.6 kW	480V	°F / 100%	6.5"	83.6"
AC5-2116-480-SP-STE-20-F-100	2 / Single	1.6 kW	480V	°F / 100%	6.5"	83.6"
AC5-2116-480-SP-STE-20-F-75	2 / Single	1.6 kW	480V	°F / 75%	6.5"	83.6"
AC5-2116-480-SP-STE-30-F-100	2 / Single	1.6 kW	480V	°F / 100%	1.6"	83.2"
AC5-2225-480-PL-STE-20-F-100	2 / Dual	2.5 kW	480V	°F / 100%	1.6"	83.2"
AC5-2225-480-PL-STE-20-F-75	2 / Dual	2.5 kW	480V	°F / 75%	4.5"	83.6"
AC5-4125-240-PL-STE-20-F-100	4 / Dual	2.5 kW	480V	°F / 100%	4.5"	83.6"
AC5-4125-480-PL-STE-10-F-100	4 / Dual	2.5 kW	480V	°F / 100%	4.5"	83.6"
AC5-4125-480-PL-STE-20-F-100	4 / Dual	2.5 kW	480V	°F / 100%	4.5"	83.6"
AC5-4125-480-PL-STE-30-F-100	4 / Dual	2.5 kW	480V	°F / 100%	4.5"	83.6"
AC5-4138-480-PL-STE-20-F-100	4 / Dual	3.8 kW	480V	°F / 100%	4.5"	83.6"
AC5-4138-480-PL-STE-20-F-75	4 / Dual	3.8 kW	480V	°F / 75%	4.5"	83.6"
AC5-4138-480-PL-STE-30-F-100	4 / Dual	3.8 kW	480V	°F / 100%	4.5"	83.6"
AC5-4238-575-SP-STE-20-80-C-60-C	4 / Dual	3.8 kW	575V	°C / 60%	2.5"	81.2"


Commercial Trucks

Part Number	Lamps/Head	Watts	Voltage	Temp/Power	Min Ht.	Max Ht.
AC5-2216-480-SP-CTE-20-F-100	2 / Dual	1.6 kW	480V	°F / 100%	11"	92.5"
AC5-2216-480-SP-CTE-20-F-75	2 / Dual	1.6 kW	480V	°F / 75%	11"	92.5"
AC5-2225-480-PL-CTE-20-F-100	2 / Dual	2.5 kW	480V	°F / 100%	11"	92.5"
AC5-2225-480-PL-CTE-20-F-75	2 / Dual	2.5 kW	480V	°F / 75%	11"	92.5"
AC5-4125-240-PL-CTE-20-F-100	4 / Dual	2.5 kW	240V	°F / 100%	13.9"	93"
AC5-4125-480-PL-CTE-20-F-100	4 / Dual	2.5 kW	480V	°F / 100%	13.9"	93"
AC5-4225-480-PL-CTE-20-F-100	4 / Dual	2.5 kW	480V	°F / 100%	6.2"	90.5"
AC5-4225-480-PL-CTE-20-F-75	4 / Dual	2.5 kW	480V	°F / 75%	6.2"	90.5"
AC5-4238-480-PL-CTE-20-F-100	4 / Dual	3.8 kW	480V	°F / 100%	6.2"	90.5"
AC5-4238-480-PL-CTE-20-F-75	4 / Dual	3.8 kW	480V	°F / 75%	6.2"	90.5"

Special Order systems

AutoCure™ 6000 Overhead Gantry Mounted Heater

The AutoCure 6000 Overhead unit is engineered for spot repairs using an overhead XY gantry system. Like our other units, the AutoCure 6000 comes in a variety of sizes and features temperature control and laser-sighting technology.

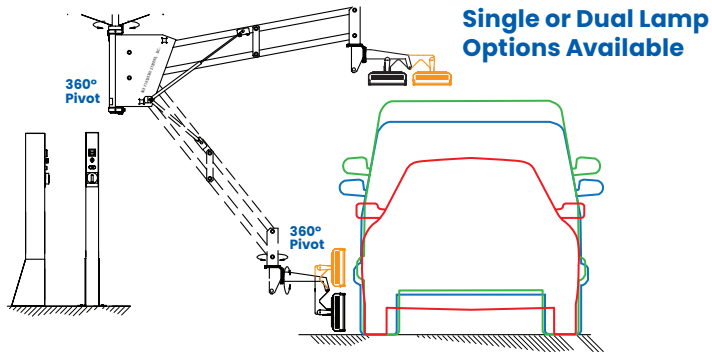


Can be configured for:

- Cars
- SUVs, Trucks
- Commercial Trucks



AutoCure™ 8000 Portable Panel Heater

The Panel Heater is engineered specifically to dry complete panel sections. This portable unit has locking wheels to maintain position. Available in two standard sizes. As with all our AutoCure units, the 8000 unit features temperature control and laser-sighting technology.

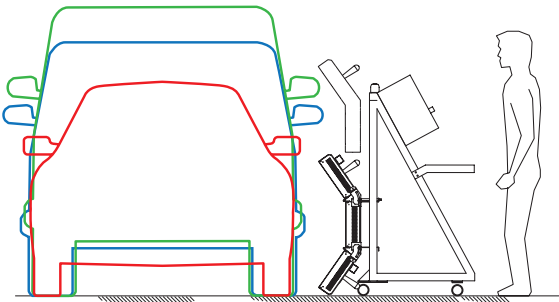

Can be configured for:

- Cars
- SUVs, Trucks
- Commercial Trucks





Experience the difference.

Binks is a leading global manufacturer of products and systems for the supply, application and curing of sprayed and dispensed materials. Binks serves a variety of industries, including automotive, pharmaceuticals, food and beverage, and manufacturing. With decades of experience, Binks continues to set the standard for precision, reliability, and innovation in fluid technology solutions.

Binks

For more information,
visit binks.com.



A powerful solution can start with a simple conversation

We want to help build the best solution to your application challenges. Learn more about what we can offer by reaching out to the office nearest you.

Americas

EMEA

China

Japan

Korea

India

South East Asia & Australia

1.800.992.4657

44.0.120 257.1111

+86 21 3373 0108

+81-(0)45-785-6339

+82 31 366 3303

+44 120 257 1111

+61 285 257555

marketing@binks.com

marketing-eu@binks.com

mkt_cn@binks.com

jp-marketing@binks.com

BinksKR@binks.com

marketing-india@binks.com

marketing-roa@binks.com

©2026 Binks.

Models and specifications subject to
change without notice. All rights reserved.
Form No. 04-520B-01