

Equipment

Designation	Part number
INTEC material hose	682660
INTEC material hose	682640
INTEC material hose	682630
INTEC material hose	682625
INTEC material hose	682620
INTEC material hose	614240
INTEC material hose	614260
INTEC material hose	614230
INTEC material hose	614225
INTEC material hose	614220
INTEC material hose	681760
INTEC material hose	681740
INTEC material hose	681730
INTEC material hose	681725
INTEC material hose	681720
INTEC material hose	613060
INTEC material hose	613040
INTEC material hose	613030
INTEC material hose	613025
INTEC material hose	613020




INTEC Material Hoses

Robust hoses for smooth gluing application

Product highlights

- High power density
- Equivalent heat distribution
- Safe and reliable construction

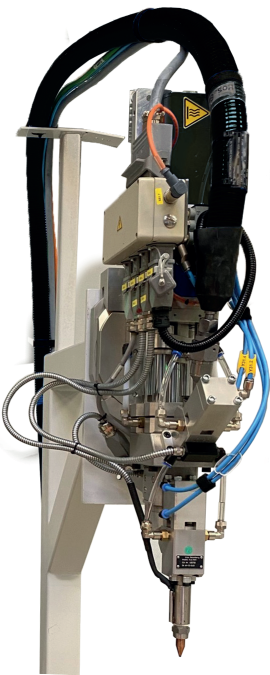

Additional information

- User manual
- Spare parts
- Accessories
- Documents
- Videos



Sames
45001 Five Mile Road
Plymouth, MI 48170 - USA
Phone: +1 734 979 0100
www.sames.com

Sames
931 Progress Ave, Unit 7
Scarborough, Ontario M1G 3V5
CANADA
Phone: +1 800 450 0655



Sames reserves the right to modify its equipment or specifications without further notice.
Document, products and pictures shown are not contractual.
09/2026

BOND • PROTECT • BEAUTIFY

www.sames.com

iNTEC Material Hoses

High pressure material hoses from iNTEC are the perfect match for high viscosity applications. These are available in heated and unheated versions depending on the type of gluing systems used.



Adapted industrial markets

Technical data table

Designation	Value	Unit
Length	350	mm (in)
Maximum Material Pressure	350 (5000)	bar (psi)
Conductive Hoses	No	
Hose Material Outer Cover	PA-12	
100% Silicone-Free	No	
Temperature Sensor	PT 100	
Heating Power	180 -250 W/m	W/m
Anti-Static	No	
Electrical Connector Type	HAN3A	
Connection Fitting	M24x1,5 / M30x2 / M42x2	

Marking

Product	Type
iNTEC Material Hoses	CE 0080

Technologies

Description

Material hoses play an essential role in a complete adhesive application system as they feed every component - from the barrel to the dosing unit - with new material. Depending on the desired adhesive, the hoses can be delivered in a heated or unheated version. If the material is viscous enough to flow sufficiently smooth, unheated systems are the option to choose. The advantages are clear: the feeding is less complex and no energy is required for a temperature regulation. In most cases, customers will opt for a heated version. Despite the greater efforts, heated systems allow the installation to operate under a constant temperature and become independent from seasons and daytimes. In addition, the viscosity of the glue will lower when being heated. The feeding and the application itself will then become a lot easier.

For maximum flexibility, iNTEC heated hoses are individually designed and produced according to customer specifications. All versions are equipped with an inner liner, a temperature sensor, a heating conductor, insulation, an outer jacket and an end cap. Temperatures can be processed and regulated by a controller thanks to the integrated sensor. They are a component of the entire heated hose. Fittings will be installed depending on the application, operating pressure, and temperatures.

Performances

- Suited for high pressure applications: works up to 350 bar
- Max. heating temperature up to 90°C (PA) and 120°C (PTFE)
- 2 - Selection of the outer jacket is determined by application. Two kinds of corrugated PA hoses available (robotic and standard)

Productivity

- Compatible with most materials: 1K and 2K epoxy, polyurethane, rubber and silicone systems
- 5 - PT-100 sensors based on 2-wire technology in proximity to the material
- 4 - Spacer: The spacer is braided glass-fiber and provides reliable protection for the heating cable against mechanical damage and hot spots in the event of bending strain. Ensures an excellent homogeneous heat distribution
- Shielded heated cable with high power density ensures high electrical safety

Sustainability

- 3 - Insulation: Special thermal fleece materials based on elastomer foam are used
- 6 - Inner liners: Available in PA (economic solution) and PTFE (lower friction and impermeable to moisture)
- 1 - Metric DIN-connecting fittings for a modular integration
- Only one connector for power and temperature sensor

